



TRANSVERSE JOINT PLANING

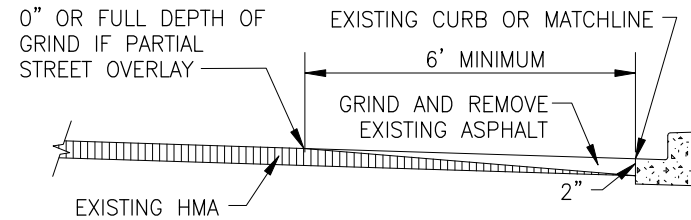

PLANING AT VERTICAL CURB

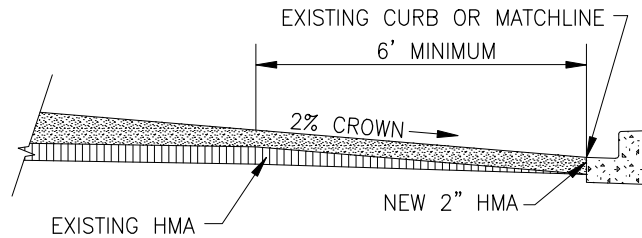

NOTES:

1. ASPHALT CONCRETE MIX SHALL BE HMA CLASS 1/2" PG 58-22.
2. ALL PAVEMENT MARKINGS SHALL BE REMOVED PRIOR TO PAVING.
3. AFTER OVERLAY, REPLACE ALL DISTURBED STRIPING AND MARKINGS.
4. ALL SAW CUTS SHALL BE VERTICAL AND IN STRAIGHT LINES AS DIRECTED BY ENGINEER.
5. TACK ASPHALT FACES OF SAW CUTS AND SEAL SAW CUTS WITH PG 58-22 OIL.
6. PAVING FABRIC (IF FOUND) WILL NOT REQUIRE REPLACEMENT.
7. IDENTIFY AND PROTECT ALL LOOP AND LOOP LEAD-INS DURING GRINDING.
8. ALL INDUCTION LOOPS SHALL BE INSTALLED PRIOR TO FINAL LIFT OF ASPHALT.

NOT TO SCALE



**CITY OF DES MOINES
PUBLIC WORKS DEPARTMENT**

ENGINEERING SERVICES
21650 11TH AVENUE SOUTH
DES MOINES, IA 50319



PAVEMENT PATCHING AND RESTORATION DETAILS

DM.A7.4

REVISED: 01/21