

ADDENDUM NO. 1

MARCH 24, 2022

TO PROSPECTIVE BIDDERS UNDER

EL PASO WATER

NORTHEAST FRANKLIN DISTRIBUTION WATER MAIN SEAN HAGGERTY PAHSE I

&

NORTHEAST FRANKLIN INTERCEPTOR SEAN HAGGERTY PHASE I

BID NO. 23-22

RECEIPT OF THIS ADDENDUM MUST BE ACKNOWLEDGED
IN WRITING TO EL PASO WATER



Rose M. Guevara
Utility Purchasing and Contracts Manager
El Paso Water*

Saul Trejo, P.E., PMP
Moreno Cardenas, Inc.
Firm Registration No. F-000554

*The Purchasing Agent's signature certifies only that this document shall become part of the Contract Document for this Project. Her signature is not a representation that the content of the document is technically correct.

I. BIDDING REQUIREMENTS, CONTRACT FORMS, CONDITIONS OF THE CONTRACT, TECHNICAL SPECIFICATIONS

- A. Plan sheets C3.1, C3.2, C3.3, and C3.4 indicate that the pipe to be used is a 16-inch Ductile Iron Pipe. On Bid Form item #4 the water main is called to be 16-inch PVC-3034. Please clarify which material is to be used for the 16-inch Water Main.

The pipe material to be used shall be 16-inch ductile iron.

- B. Per the manhole detail interior coating will be required, will these also require exterior coating?

Exterior coatings will be required only if groundwater is found.

II. SUPPLEMENTAL CONTRACT DOCUMENT CLARIFICATIONS

- A. When is the Arroyo/Channel work expected to start or be completed?

The EPW Enhanced Arroyo project is a multi-phased construction project. NE ASR Phase 1 project limits (which is currently being advertised) do not extend to the NORTHEAST FRANKLIN DISTRIBUTION WATER MAIN SEAN HAGGERTY PHASE I & NORTHEAST FRANKLIN INTERCEPTOR SEAN HAGGERTY PHASE project limits with exception of a watermain connection that is shown in the attached Exhibit A. Successfully bidder will be required to coordinate work as relates to sequencing of this work. Future NE ASR phases to include grading and arroyo improvements are not anticipated to start construction until after the NORTHEAST FRANKLIN DISTRIBUTION WATER MAIN SEAN HAGGERTY PHASE I & NORTHEAST FRANKLIN INTERCEPTOR SEAN HAGGERTY PHASE

- B. There are several power distribution poles parallel to the proposed water and sewer lines, due to the depth these may require pole holding by El Paso Electric. Who is to pay these fees, Owner or Contractor?

The Contractor is expected to pay and coordinate with El Paso Electric to retain the transmission poles.

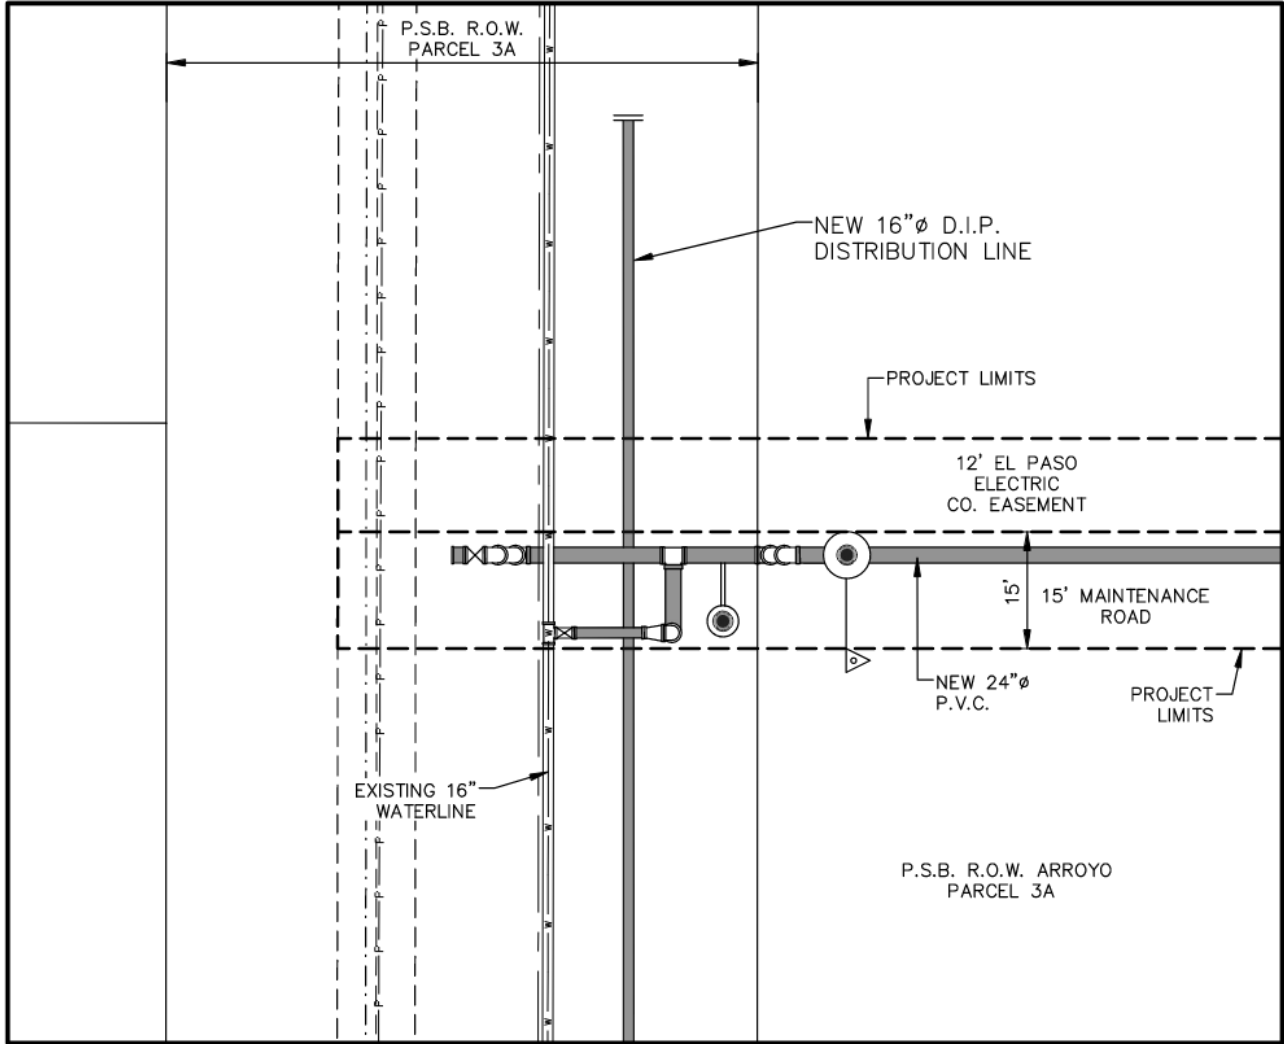


Exhibit A – Tie-in location

END OF ADDENDUM NO. 1